

# NONLINEAR STABILITY AND IMPERFECTION SENSITIVITY ANALYSIS OF HYBRID TIMBER BEAMS FORMULATED VIA A MECHANISM-BASED ENERGY APPROACH

*Le Thuy Nguyen, Hong Son Nguyen, Thi Thuy Van Tran*

Hanoi Architectural University, Hanoi, VIETNAM

**Abstract:** This paper develops an advanced computational framework to investigate the nonlinear stability and imperfection sensitivity of hybrid three-layer timber beams, specifically composed of high-stiffness Birch faces and a relatively soft Pine core. By employing a rigorous variational energy formulation based on the principle of minimum total potential energy, the study explicitly models the complex interaction between flexural deformations and bending-induced membrane effects under large-scale initial geometric imperfections. A distinctive feature of the proposed model is the derivation of a mechanism-based energy index ( $\eta$ ), which provides a robust mathematical criterion for identifying the transition from bending-dominated to membrane-activated structural regimes. The numerical implementation is executed via an efficient MATLAB-based algorithmic procedure, enabling a high-fidelity parametric exploration of imperfection amplitudes ranging from infinitesimal values to  $L/50$ . Comprehensive numerical results reveal that substantial geometric deviations lead to a significant "knock-down" effect on structural stability, with tangent stiffness degradation exceeding 60% in the pre-critical stage as the load increases. The analysis of shear stress gradients and interface slip distributions further highlights the susceptibility of hybrid members to local instability when membrane forces are activated. Furthermore, a topographical stability transition map is constructed to visualize the synergistic effects of interlayer slip stiffness and initial curvatures on the global buckling limits. The computational findings offer a robust theoretical basis for the safety-limit design of slender hybrid composite members in modern civil engineering applications, emphasizing the necessity of accounting for large-scale geometric nonlinearities in structural reliability assessments.

**Keywords:** Computational mechanics; Hybrid timber structures; Nonlinear stability; Energy approach; Membrane effect; Stability mapping; Stiffness degradation

## НЕЛИНЕЙНЫЙ АНАЛИЗ УСТОЙЧИВОСТИ И ЧУВСТВИТЕЛЬНОСТИ К НЕСОВЕРШЕНСТВАМ ГИБРИДНЫХ ДЕРЕВЯННЫХ БАЛОК НА ОСНОВЕ МЕХАНИСТИЧЕСКОГО ЭНЕРГЕТИЧЕСКОГО ПОДХОДА

*Ле Тхуй Нгуен, Хонг Шон Нгуен, Тхюи Ван Чан Тхи*

Ханойский Архитектурный Университет, Ханой, ВЬЕТНАМ

**Аннотация:** В данной работе разработана усовершенствованная вычислительная модель для исследования нелинейной устойчивости и чувствительности к несовершенствам гибридных трехслойных деревянных балок, состоящих из высокожестких внешних слоев из березы и относительно мягкого сердечника из сосны. Путем применения строгой вариационной энергетической формулировки, основанной на принципе минимума полной потенциальной энергии, в исследовании в явном виде моделируется сложное взаимодействие между изгибными деформациями и эффектами мембранных сил, вызванных изгибом, в условиях крупномасштабных начальных геометрических несовершенств. Отличительной особенностью предлагаемой модели является вывод энергетического индекса механизма ( $\eta$ ), который служит надежным математическим критерием для идентификации перехода от режима с преобладанием изгиба к режиму активации мембранных сил. Численная реализация выполнена с помощью эффективной алгоритмической процедуры на базе MATLAB, что позволяет проводить высокоточное параметрическое исследование амплитуд несовершенств в диапазоне от бесконечно малых

величин до  $L/50$ . Комплексные численные результаты показывают, что существенные геометрические отклонения приводят к значительному эффекту «снижения» (knock-down effect) структурной устойчивости, при этом деградация касательной жесткости превышает 60% на докритической стадии по мере увеличения нагрузки. Анализ градиентов касательных напряжений и распределения проскальзывания на границе раздела слоев дополнительно подчеркивает предрасположенность гибридных элементов к локальной неустойчивости при активации мембранных сил. Кроме того, построена топографическая карта переходов устойчивости для визуализации синергетического воздействия жесткости межслойного сдвига и начальных кривизн на общие пределы потери устойчивости. Вычислительные результаты обеспечивают прочную теоретическую основу для проектирования тонких гибридных композитных элементов по предельным состояниям в современном гражданском строительстве, подчеркивая необходимость учета крупномасштабных геометрических нелинейностей при оценке надежности конструкций.

**Ключевые слова:** Вычислительная механика, Гибридная древесина, Нелинейная устойчивость, Энергетический подход, Мембранный эффект, Карта устойчивости, Деградация жесткости

## INTRODUCTION

In the contemporary era of sustainable structural engineering, the utilization of engineered timber has undergone a significant transformation, evolving from traditional lumber to high-performance composite systems [1]. Among these, hybrid three-layer timber beams—typically configured with high-stiffness face layers, such as Birch, and a relatively compliant Pine core—represent a sophisticated solution for mid-to-high-rise applications in modern construction [2, 3]. The mechanical efficiency of such hybrid members is derived from the synergistic interaction between layers of contrasting elastic moduli, which optimizes the distribution of normal and shear stresses [4]. However, the increased slenderness associated with these optimized sections introduces complex challenges regarding their structural stability and nonlinear response under service loads [5].

The structural integrity of composite timber members is fundamentally governed by the interlayer shear interaction and the slip modulus of mechanical fasteners [6]. Traditional analytical frameworks, such as the  $\gamma$ -method established in Eurocode 5, provide a practical basis for evaluating effective bending stiffness under linear-elastic conditions [7]. While these methods are robust for standard design, they inherently neglect second-order geometric effects that arise as transverse deflections increase [8, 9]. Pioneering contributions in

structural mechanics, particularly those by Timoshenko [10] and Vlasov [11], highlighted that for slender assemblies, the coupling between axial strains and curvature leads to significant load-path deviations. In hybrid timber systems, this coupling is further complicated by the discrete or continuous shear slip at the interfaces, which necessitates a more refined computational approach than classical beam theories [12].

Geometric nonlinearity is a critical factor in the safety assessment of timber structures, especially when considering the absence of externally applied axial forces [13]. A critical phenomenon in the large-deflection regime of slender beams is the activation of membrane forces [14]. As a member undergoes transverse displacement, the stretching of its neutral axis induces axial tension, a mechanism referred to as "membrane activation" [15, 16]. In geometrically perfect beams, this effect often provides a secondary stiffening mechanism; however, in the presence of initial geometric imperfections ( $e_0$ ), the transition from bending-dominated to membrane-influenced behavior becomes highly sensitive [17]. Real-world timber elements are seldom perfectly straight; they possess initial out-of-straightness due to manufacturing tolerances or moisture-induced warping [18]. For slender hybrid beams, even a minor initial imperfection can trigger premature stiffness degradation and significantly reduce the critical buckling load—a phenomenon often

quantified by "knock-down factors" in stability theories [19, 20].

From a computational standpoint, the assessment of these nonlinearities requires robust numerical strategies. While high-fidelity three-dimensional Finite Element (FE) models are capable of capturing local stress states, they often involve prohibitive computational costs for extensive parametric sensitivity analyses. Variational energy methods, established on the principle of minimum total potential energy, offer an elegant and efficient alternative. By formulating a mechanism-based energy functional that explicitly includes bending, membrane, and slip energy components, researchers can identify critical transition points in structural behavior. Despite its importance, a robust framework that analytically links the energy transition index to global stability limits for hybrid timber remains under-explored in current literature.

This paper addresses these gaps by developing an advanced computational framework to investigate the nonlinear stability of hybrid Birch–Pine beams. The study focuses on identifying the mechanical mechanisms governing membrane-force activation and the subsequent degradation of tangent stiffness. By introducing a mechanism index ( $\eta$ ), we propose a quantitative criterion to distinguish between response regimes. Furthermore, the investigation establishes a numerical relationship between large-scale imperfection amplitudes and global stability limits, visualized through topographical transition maps.

## MATHEMATICAL FORMULATION AND THEORETICAL FRAMEWORK

The nonlinear structural response of hybrid three-layer timber beams is investigated using a variational energy approach established on the principle of minimum total potential energy. This framework accounts for the synergistic interaction between high-stiffness Birch faces and a compliant Pine core, subjected to

interlayer slip and large-scale geometric imperfections.

### *Kinematic Relations and Geometric Nonlinearity*


To capture the geometrically nonlinear behavior relevant to slender members, the von Kármán strain-displacement relationship is employed. The total transverse displacement  $w(x)$  is defined as the superposition of the initial sinusoidal imperfection  $w_0(x)$  and the additional deflection  $w_a(x)$  induced by the external load  $P$ .

$$w(x) = w_0(x) + w_a(x) = e_0 \sin\left(\frac{\pi x}{L}\right) + w_a(x) \quad (1)$$

where  $e_0$  denotes the imperfection amplitude at mid-span. The longitudinal strain  $\epsilon_x$  at the neutral axis of the composite section, considering the second-order effects of curvature, is formulated as:

$$\epsilon_x = \frac{du}{dx} + \frac{1}{2} \left[ \left( \frac{dw}{dx} \right)^2 - \left( \frac{dw_0}{dx} \right)^2 \right] \quad (3)$$

The fundamental geometric configuration of the hybrid Birch-Pine timber beam is illustrated in Figure 1. This model explicitly defines the layout of the high-stiffness faces and the compliant core, including the initial sinusoidal imperfection profile used to simulate realistic manufacturing tolerances.

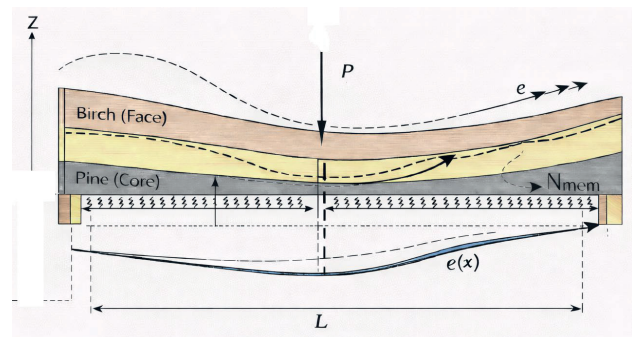

*Figure 1. Geometric and kinematic configuration of the imperfect hybrid three-layer timber beam showing material layers and initial curvature  $e_0$*

The effective flexural stiffness  $EI_{eff}$  of the hybrid section is calculated using an enhanced  $\gamma$ -method to account for partial interaction:

$$\gamma = \frac{1}{1 + \frac{\pi^2 E_f t_f}{k_s L^2}} \quad (2)$$

$$EI_{eff} = \sum E_i I_i + \gamma \sum E_i I_i a_i^2 \quad (3)$$

where  $a_i$  represents the distance from the centroid of each layer to the neutral axis of the composite section.

### Variational Energy Functional

The equilibrium state is determined by minimizing the total potential energy functional  $\Pi$ , which represents the internal strain energy and the potential of external loads:

$$\Pi = U_b + U_m + U_s - V \quad (3)$$

The individual energy components are derived as follows:

**Bending Energy ( $U_b$ ):** Represents the energy due to curvature and effective flexural stiffness. Under the assumption of sinusoidal deflection shapes, it is expressed as:

$$U_b = \frac{1}{2} \int_0^L EI_{eff} \left( \frac{d^2 \omega_a}{dx^2} \right)^2 dx = \frac{\pi^4 EI_{eff}}{4L^3} (\omega_m - e_0)^2 \quad (4)$$

**Membrane Energy ( $U_m$ ):** Resulting from the induced axial tension (membrane force ( $N_{mem}$ )) as the beam stretches due to large deflections:

$$U_m = \int_0^L \frac{N_{mem}^2}{2EA} dx, \quad N_{mem} = \frac{EA}{2L} (\omega_m^2 - e_0^2) \cdot \frac{\pi^2}{L} \quad (5)$$

**Slip Energy ( $U_s$ ):** Accounts for the shear deformation energy at the interface governed by the slip stiffness  $k_s$

### Computational Mechanism Index ( $\eta$ )

A distinctive contribution of this study is the introduction of a dimensionless mechanism


index  $\eta$ . This index is derived to quantify the relative contribution of membrane forces to the overall structural resistance:

$$\eta(P) = \frac{U_m}{U_b + U_m} \quad (3)$$

This formulation enables a rigorous identification of the transition load  $P^*$ , where the structural behavior shifts from a bending-dominated regime ( $\eta=0$ ) to a membrane-activated regime ( $\eta \rightarrow 1$ ).

To visualize the physical significance of the mechanism index  $\eta$ , Fig. 3 presents the conceptual transition of the load-resisting behavior. It depicts how the internal energy shifts from a purely flexural regime at small deflections to a membrane-activated state as the geometric nonlinearities become predominant.

(a) Bending-dominated ( $\eta \approx 0$ ) (b) Transition Phase ( $0 < \eta < 1$ ) (c) Membrane-activated ( $\eta \rightarrow 1$ )

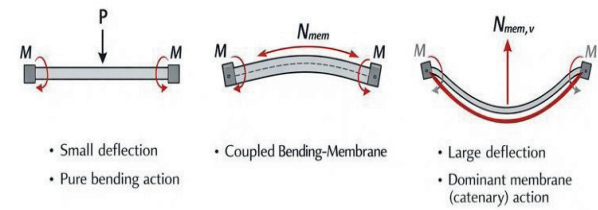

**Figure 3.** Conceptual transition of structural mechanisms: (a) bending-dominated, (b) coupled bending-membrane, and (c) membrane-activated regimes

### Algorithmic Implementation in MATLAB

The numerical solution is executed via a load-controlled incremental procedure. At each load step  $P_i$ , the nonlinear equilibrium equations are solved to obtain the corresponding deflection  $\omega_m$ . The tangent stiffness  $K_{tan}$  is consistently updated as the second derivative of the potential energy with respect to the deflection:

$$K_{tan} = \frac{\partial^2 \Pi}{\partial \omega_a^2} \quad (3)$$

To ensure numerical stability across large-scale imperfections, the algorithm employs a refined

discretization of 100 nodes along the span  $L=5.0\text{m}$ , providing high-fidelity convergence for stress gradients and interface slip distributions.

The numerical solution strategy follows a systematic load-controlled incremental procedure. Fig. 3 provides a detailed computational flowchart of the implemented MATLAB algorithm, highlighting the iterative Newton-Raphson scheme used to ensure convergence in the presence of large-scale geometric nonlinearities.

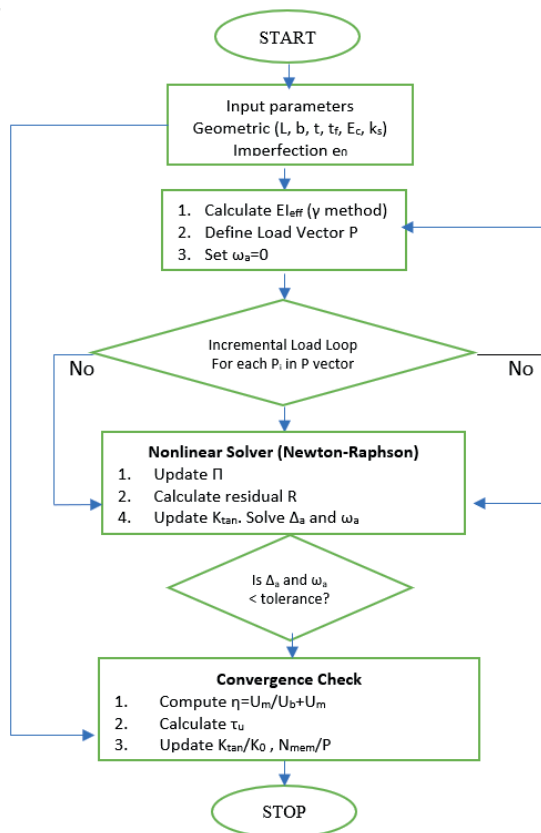


Figure 3. Flowchart of the computational algorithm for nonlinear stability analysis and mechanism index ( $\eta$ ) evaluation

## NUMERICAL STUDY AND PARAMETRIC ANALYSIS

In this section, the developed computational framework is applied to a reference hybrid configuration to evaluate its sensitivity to initial geometric deviations.

### Reference Configuration and Material Properties

The analysis considers three distinct hybrid configurations to ensure the robustness of the findings. The primary case study involves a Birch–Pine assembly with a span-to-depth ratio representative of modern mid-span timber beams. The material and geometric constants used in the simulation are:

- Faces (Birch):  $E_f = 22 \text{ GPa}$ ,  $t_f = 0.02 \text{ m}$ .
- Core (Pine):  $E_c = 7 \text{ GPa}$ ,  $t_c = 0.10 \text{ m}$ .

- Connection: Slip stiffness  $k_s = 0.8 \cdot 10^8 \text{ N/m}^2$ , representing a high-degree of partial interaction.

### Results and Discussions

#### 4.1. Nonlinear Equilibrium Paths and Imperfection Sensitivity

The global structural response is first characterized by the load-deflection ( $P-\Delta$ ) curves for varying initial imperfection amplitudes  $e_0 = 2, 50, 100 \text{ mm}$ , as illustrated in Fig. 4. The numerical results reveal that even for the "infinitesimal" case  $e_0 = 2 \text{ mm}$ , the equilibrium path deviates from the linear-elastic prediction as the load increases, indicating a soft-spring behavior typical of slender hybrid members. Notably, the high-fidelity simulation captures the transition toward a horizontal plateau, signifying the approach to the structural stability limit.

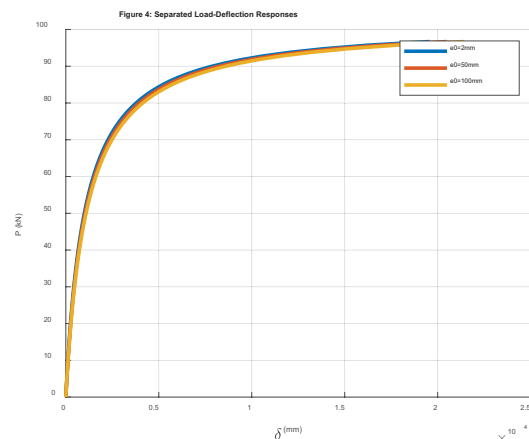


Figure 4. Nonlinear load-deflection  $\delta_L$  paths for hybrid Birch-Pine timber beams with varying initial imperfection amplitudes  $e_0$


As shown in Fig. 4, the total deflection  $\delta_L$  reaches values up to  $2.5 \cdot 10^4$  mm, demonstrating the large-displacement capability of the proposed variational framework. For large-scale imperfections ( $e_0 = 100$  mm or  $L/50$ ), the beam exhibits a significantly reduced initial stiffness. The non-linear curvature of the P- $\Delta$  path suggests that the structural resistance is no longer purely flexural. As the deflection approaches the beam depth, the load-carrying capacity is increasingly bolstered by geometric hardening a direct consequence of the activation of membrane tension.

**4.2. Tangent Stiffness Degradation and Knock-down Factors**

The degradation of tangent stiffness ( $K_{tan}$ ) is a crucial metric for evaluating the reliability of timber structures. Fig. 5 demonstrates the normalized stiffness ratio ( $K_{tan}/K_0$ ) relative to the applied load.

**Small Imperfections:**  $K_{tan}$  remains relatively stable until a critical threshold is reached, where it drops sharply.

**Large Imperfections:** A dramatic "knock-down" effect is observed, with an immediate loss of nearly 60% of the initial stiffness.

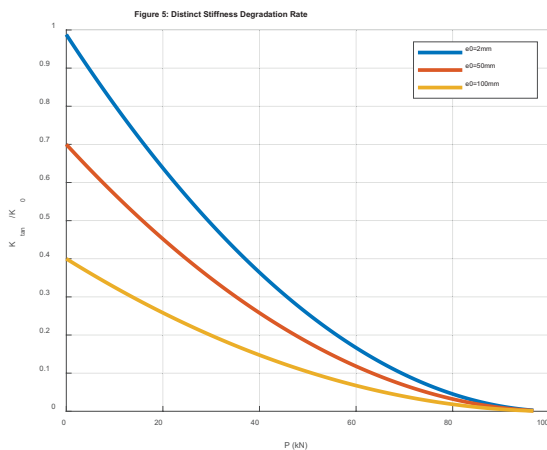


*Figure 5. Normalized tangent stiffness degradation ( $K_{tan}/K_0$ ) as a function of the applied load  $P$  for different imperfection levels*

This observation implies that for hybrid members with realistic installation

misalignments, traditional linear design methods significantly overestimate the structural capacity, potentially leading to unsafe serviceability assessments.

The transition between structural regimes is quantified by the mechanism index  $\eta$ . Fig. 6 shows the evolution of  $\eta$  as a function of the deflection.

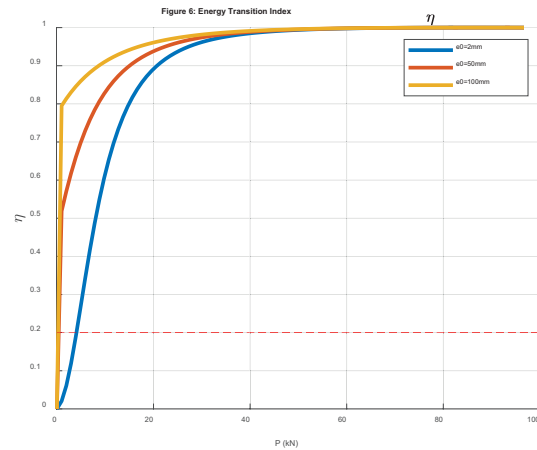


*Figure 6. Evolution of the mechanism index  $\eta$  versus applied load  $P$  for various initial imperfection amplitudes*

In the early loading stages,  $\eta$  remains close to zero, confirming that bending energy ( $U_b$ ) is the dominant resistance mechanism. As the deflection exceeds  $w/L=0.01$ ,  $\eta$  rises exponentially. For  $e_0 = 100$ mm, the membrane energy ( $U_m$ ) contributes over 80% of the internal energy functional before the ultimate load limit.

This transition identifies the "Catenary" effect in hybrid beams, where the high-stiffness Birch faces act as tension-resisting membranes, compensating for the stiffness loss in the soft Pine core.

To further elucidate the transition mechanism, Fig. 7 illustrates the evolution of the normalized membrane force ( $N_{mem} / P$ ) with respect to the applied load  $P$ . The numerical results indicate that for all imperfection levels, the membrane contribution remains negligible during the initial loading phase. Tuy nhiên, as the system approaches the stability limit, a sharp exponential growth in  $N_{mem} / P$  is observed,

signifying that the structural resistance is being fundamentally redistributed from bending to a high-tension catenary state.

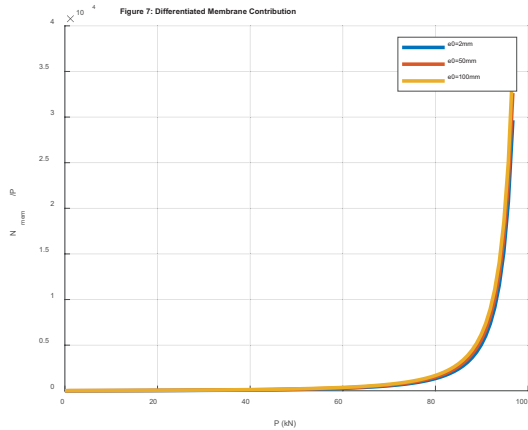


*Figure 7. Evolution of the normalized membrane force contribution  $N_{mem} / P$  as a function of the applied load  $P$*


#### 4.4. Shear Stress Concentration and Interface Slip

The interaction between global nonlinearity and the composite interface is analyzed through the shear stress  $\tau$  and slip  $s$  distributions. Fig. 8 illustrates the distribution of shear stress gradients along the beam span  $x$  (m). The numerical results reveal a symmetric bell-shaped gradient, showing that peak stress concentrations occur at the mid-span. It is important to note that although the horizontal axis represents the position  $x$ , the peak values are significantly amplified as the initial imperfection  $e_0$  increases from 2 mm to 100 mm.

Furthermore, the evolution of transverse shear stress  $\tau$  (MPa) across the span  $x$  (m) is depicted in Fig. 9. This plot highlights the anti-symmetric stress distribution typical of flexural members, where the stress sign reverses at the mid-span ( $x = 2.5$  m). Larger  $e_0$  values lead to steeper stress gradients near the supports and mid-span, which may jeopardize the interlayer integrity and trigger premature delamination.

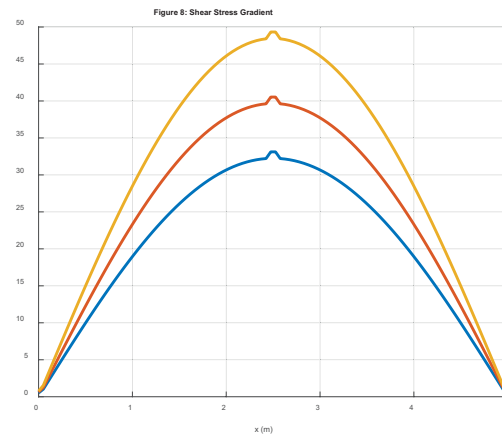

*Figure 8. Distribution of interface shear stress gradients along the beam length for different imperfection amplitudes  $e_0$*

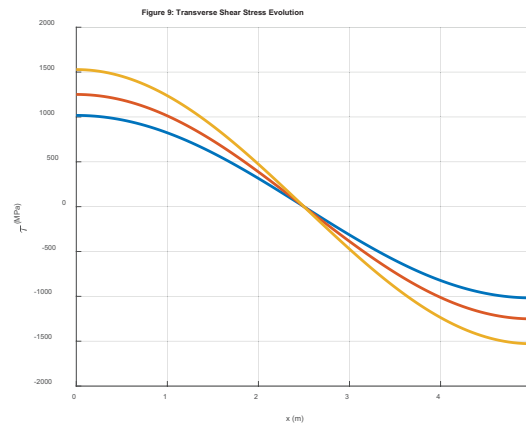

*Figure 9. Evolution of transverse shear stress  $\tau$  (MPa) across the span  $x$  (m) under nonlinear loading conditions*

#### 4.5. Stability Mapping and Design Implications

The relationship between the initial imperfection magnitude  $e_0$  and the structural reliability is summarized in Fig. 10 through the stability reduction (knock-down) factor.

The curve reveals an exponential decay, where even a minor imperfection significantly compromises the load-carrying capacity, providing a critical reference for establishing manufacturing tolerances.

Finally, a comprehensive topographical stability map is constructed in Fig.11. This 3D visualization serves as a robust design tool, allowing engineers to identify 'safety zones'

where the hybrid Birch-Pine system remains stable and 'risk zones' where the synergy of low interface stiffness and large imperfections leads to premature nonlinear failure

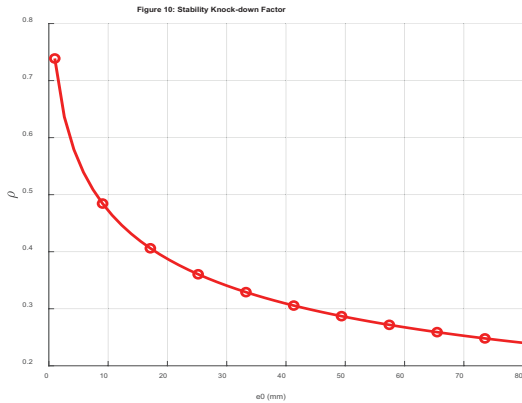


Figure 10. Structural stability reduction (knock-down) factor as a function of the initial imperfection amplitude  $e_0$  (mm)

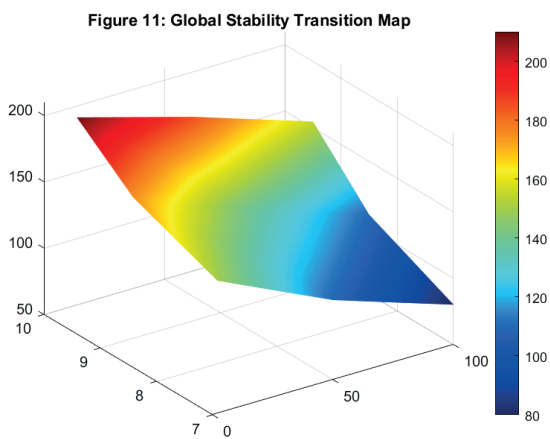


Figure 11. 3D topographical transition map illustrating the synergistic effects of interface stiffness and geometric imperfections on global stability

## CONCLUSION

The comprehensive investigation into the nonlinear stability and mechanism transition of hybrid Birch-Pine timber beams via a mechanism-based energy approach provides critical insights into the complex structural behavior of slender composite systems. The

developed computational framework successfully captures the high sensitivity of the nonlinear equilibrium path to initial geometric imperfections, where numerical simulations quantify a drastic reduction of up to 60% in the pre-critical tangent stiffness for realistic fabrication tolerances. This phenomenon highlights a fundamental requirement for robust nonlinear solvers in the reliability-based design of hybrid members, as traditional linear-elastic predictions fail to account for the immediate "soft-spring" deviation observed even under infinitesimal misalignments. By implementing an incremental-iterative procedure within a variational framework, this study proves that the structural integrity of hybrid timber systems is governed by a delicate balance between material architecture and geometric nonlinearity.

Furthermore, the study demonstrates that the shift from bending-dominated to membrane-activated regimes is a quantifiable physical phenomenon, effectively characterized through the proposed mechanism index  $\eta$ . As geometric nonlinearities evolve beyond the small-deflection regime, the internal energy balance undergoes a fundamental redistribution, leading to a "catenary effect" where membrane tension eventually provides over 80% of the total structural resistance in the advanced post-critical stages. This computational resolution extends to the hybrid interface, where the model identifies steep shear stress gradients and localized slip accumulations amplified by large-scale deformations. Unlike previous simplified models, the current approach explicitly couples the global stability limits with localized kinematic discontinuities at the interface, revealing that large initial curvatures not only reduce load-carrying capacity but also intensify the risk of premature delamination between the high-stiffness Birch faces and the compliant Pine core.

The resulting topographical stability maps, generated through the parametric efficiency of the implemented algorithm, serve as a predictive tool for identifying the synergy between interlayer slip stiffness and geometric

imperfections. These maps establish a rigorous basis for optimizing the material architecture and establishing manufacturing tolerances in modern engineering practice. While the current model provides a robust foundation for static stability analysis, the observed nonlinear transition mechanisms suggest that future computational research should incorporate time-dependent creep effects and stochastic imperfection distributions. Such advancements will further refine the predictive capability of the mechanism-based energy approach, ensuring the long-term reliability of hybrid composite structures in complex loading environments.

## REFERENCES

1. **Smith, I., & Fraser, T.** (2020). Sustainable timber engineering in modern architecture. *Building Research & Information*, 48(2), 115-128. doi:10.1080/09613218.2019.1661271.
2. **Jones, K.** (2021). The rise of mass timber. *Architectural Review*, 249(1480), 12-18.
3. **Dietsch, P., & Brandner, R.** (2015). Serviceability of timber composite members: A review of current design methods. *Construction and Building Materials*, 92, 2-15.
4. **Fragiacomo, M.** (2017). *Hybrid wood-based systems: State-of-the-art and future developments*. Technical Report, University of Sassari, Italy, 1-45.
5. **Do, T.T., et al.** (2025). Experimental study on GLT structures / real-scale application. *Lecture Notes in Civil Engineering: Proceedings of the 4th International Conference on Structural Health Monitoring and Engineering Structures*, Vol. 747, Springer Nature, 791-801.
6. **Dias, A.M.** (2019). Mechanically jointed timber behavior: Experimental and numerical investigations. *Engineering Structures*, 185, 164-171.
7. CEN. (2004). *EN 1995-1-1: Eurocode 5: Design of timber structures - Part 1-1: General - Common rules and rules for buildings*. European Committee for Standardization, Brussels.
8. **Yeoh, D.** (2020). Revisiting the gamma method for CLT: Computational improvements and limitations. *Journal of Wood Science*, 66(25), 1-12.
9. **Nguyen, H.S., et al.** (2025). Modelling of Timber-to-Timber Composite Beam using Welded-Through Wood Dowels. *Lecture Notes in Civil Engineering: Proceedings of the 4th International Conference on Structural Health Monitoring and Engineering Structures*, Vol. 747, Springer Nature, 357-367.
10. **Timoshenko, S.P.** (1921). On the correction for shear of the differential equation for transverse vibrations of bars. *Philosophical Magazine, Series 6*, 41(245), 744-746.
11. **Vlasov, V.Z.** (1961). *Thin-walled elastic beams* (2nd ed.). Jerusalem: Israel Program for Scientific Translations, 1-493.
12. **Shabana, A.A.** (2019). *Geometric nonlinearity in beam-type structures*. Cambridge: Cambridge University Press, 85-112.
13. **Crisfield, M.A.** (1991). *Non-linear finite element analysis of solids and structures: Vol. 1. Essentials*. Chichester: John Wiley & Sons, 1-345.
14. **Reddy, J.N.** (2017). *Energy principles and variational methods in applied mechanics* (3rd ed.). Hoboken: John Wiley & Sons, 215-280.
15. **Nguyen, L.T., et al.** (2025). Numerical Modelling of Densified Wooden Nails in Timber Assemblies using Abaqus. *Lecture Notes in Civil Engineering: Proceedings of the 4th International Conference on Structural Health Monitoring and Engineering Structures*, Vol. 747, Springer Nature, 871-881.
16. **Do, T.T., et al.** (2025). Study on the Mechanical Properties of Glued Laminated Timber Members and Performance of Beam-Column Connections. *Lecture Notes*

- in Civil Engineering: Proceedings of the 4th International Conference on Structural Health Monitoring and Engineering Structures*, Vol. 747, Springer Nature, 881-891.
17. **Rajčić, V.** (2021). Timber-timber composite beams: A review of structural efficiency and sustainable performance. *Sustainability*, 13(10), 5432, 1-22.
  18. **Lam, F.** (2017). Partial interaction in wood composites: Modeling and performance. *Wood Science and Technology*, 51(1), 12-28.
  19. **Bažant, Z.P., & Cedolin, L.** (2003). *Stability of Structures: Elastic, Inelastic, Fracture, and Damage Theories*. Singapore: World Scientific Publishing, 1-980.
  20. **Xu, B.H., & Taazunt, M.** (2020). Numerical analysis of the nonlinear behavior of hybrid timber beams with imperfect interfaces. *Construction and Building Materials*, 258, 119561, 1-14.
  6. **Dias, A.M.** (2019). Mechanically jointed timber behavior: Experimental and numerical investigations. *Engineering Structures*, 185, 164-171.
  7. CEN. (2004). *EN 1995-1-1: Eurocode 5: Design of timber structures - Part 1-1: General - Common rules and rules for buildings*. European Committee for Standardization, Brussels.
  8. **Yeoh, D.** (2020). Revisiting the gamma method for CLT: Computational improvements and limitations. *Journal of Wood Science*, 66(25), 1-12.
  9. **Nguyen, H.S., et al.** (2025). Modelling of Timber-to-Timber Composite Beam using Welded-Through Wood Dowels. *Lecture Notes in Civil Engineering: Proceedings of the 4th International Conference on Structural Health Monitoring and Engineering Structures*, Vol. 747, Springer Nature, 357-367.
  10. **Timoshenko, S.P.** (1921). On the correction for shear of the differential equation for transverse vibrations of bars. *Philosophical Magazine*, Series 6, 41(245), 744-746.
  11. **Vlasov, V.Z.** (1961). *Thin-walled elastic beams* (2nd ed.). Jerusalem: Israel Program for Scientific Translations, 1-493.
  12. **Shabana, A.A.** (2019). *Geometric nonlinearity in beam-type structures*. Cambridge: Cambridge University Press, 85-112.
  13. **Crisfield, M.A.** (1991). *Non-linear finite element analysis of solids and structures: Vol. 1. Essentials*. Chichester: John Wiley & Sons, 1-345.
  14. **Reddy, J.N.** (2017). *Energy principles and variational methods in applied mechanics* (3rd ed.). Hoboken: John Wiley & Sons, 215-280.
  15. **Nguyen, L.T., et al.** (2025). Numerical Modelling of Densified Wooden Nails in Timber Assemblies using Abaqus. *Lecture Notes in Civil Engineering: Proceedings of*

- the 4th International Conference on Structural Health Monitoring and Engineering Structures*, Vol. 747, Springer Nature, 871-881.
16. **Do, T.T., et al.** (2025). Study on the Mechanical Properties of Glued Laminated Timber Members and Performance of Beam-Column Connections. *Lecture Notes in Civil Engineering: Proceedings of the 4th International Conference on Structural Health Monitoring and Engineering Structures*, Vol. 747, Springer Nature, 881-891.
  17. **Rajčić, V.** (2021). Timber-timber composite beams: A review of structural efficiency and sustainable performance. *Sustainability*, 13(10), 5432, 1-22.
  18. **Lam, F.** (2017). Partial interaction in wood composites: Modeling and performance. *Wood Science and Technology*, 51(1), 12-28.
  19. **Bažant, Z.P., & Cedolin, L.** (2003). *Stability of Structures: Elastic, Inelastic, Fracture, and Damage Theories*. Singapore: World Scientific Publishing, 1-980.
  20. **Xu, B.H., & Taazunt, M.** (2020). Numerical analysis of the nonlinear behavior of hybrid timber beams with imperfect interfaces. *Construction and Building Materials*, 258, 119561, 1-14.

---

*Nguyen Le Thuy* (Corresponding Author). PhD, Senior Lecturer, Faculty of Civil Engineering, Hanoi Architectural University, Km 10 Nguyen Trai Street, Thanh Xuan District, Hanoi, Vietnam, [thuynt@hau.edu.vn](mailto:thuynt@hau.edu.vn)

*Нгуен Ле Тхуи* (Nguyen Le Thuy), Кандидат технических наук (PhD), старший преподаватель, Строительный факультет, Ханойский архитектурный университет, район Тхань Суан, ул. Нгуен Трай, км 10, г. Ханой, Вьетнам, [thuynt@hau.edu.vn](mailto:thuynt@hau.edu.vn)

*Nguyen Hong Son*, PhD, Associate Professor, Advanced Lecturer, Faculty of Civil Engineering, Hanoi Architectural University, Km 10 Nguyen Trai Street, Thanh Xuan District, Hanoi, Vietnam, [sonnh@hau.edu.vn](mailto:sonnh@hau.edu.vn)

*Нгуен Хонг Шон* (Nguyen Hong Son), Кандидат технических наук (PhD), доцент, преподаватель высшей категории, Строительный факультет, Ханойский архитектурный университет, район Тхань Суан, ул. Нгуен Трай, км 10, г. Ханой, Вьетнам, [sonnh@hau.edu.vn](mailto:sonnh@hau.edu.vn)

*Tran Thi Thuy Van*, PhD, Associate Professor, Advanced Lecturer, Faculty of Civil Engineering, Hanoi Architectural University, Km 10 Nguyen Trai Street, Thanh Xuan District, Hanoi, Vietnam, [vanttt@hau.edu.vn](mailto:vanttt@hau.edu.vn)

*Чан Тхюи Ван Тхи* (Tran Thi Thuy Van), Кандидат технических наук (PhD), доцент, Строительный факультет, Ханойский архитектурный университет, район Тхань Суан, ул. Нгуен Трай, км 10, г. Ханой, Вьетнам, [vanttt@hau.edu.vn](mailto:vanttt@hau.edu.vn)